

retigo®

Bakery/Confectionery ovens

Bakery/Confectionery ovens



HP 5



HP 8

RETIGO HP 5 & HP 8

The following is characteristic of all models:

- Made of premium stainless steel
- Electronic microprocessor control system
- Digital control board
- 3 - step regulation of humidity inside the baking chamber
- Intensive moistening system
- The flap valve for the quick release of unwanted moisture from the baking chamber
- Hygienic baking chamber with rounded inside corners
- Even baking thanks to the bi-directional fan
- Perfect illumination of the baking chamber by means of halogen lights
- Double glass door that limits the escape of heat
- Double glass door cooling (HPS – heat protection system)
- Removable door seal for easy maintenance
- Two position door catch (safety position)
- Acoustic signal when baking process finished
- Integrated shower option
- IPX 5 shield

Models HP 5 & HP 8

- Hot air 30 - 280°C
- Manual moistening
- Time setting from 1 to 24 hrs.
- Permanent light mode
- 100 programs with 5 steps
- Automatic start mode
- Rapid cooling of the baking chamber
- Sleep mode
- Preheating of the baking chamber
- Two speed motor
- 12 fast choice programs for often made products
- Special program for baking of frozen products

OPTIONAL:

- HACCP set
- Flap valve
- Integrated shower


THE HEART OF THE MODERN KITCHEN

retigo®


Bakery/Confectionery ovens

THE HEART OF THE MODERN KITCHEN

RETIGO HP 5

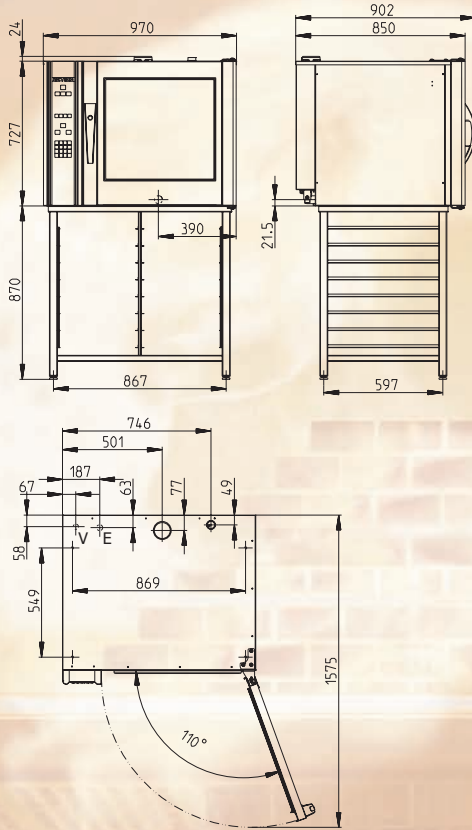

RETIGO HP 8

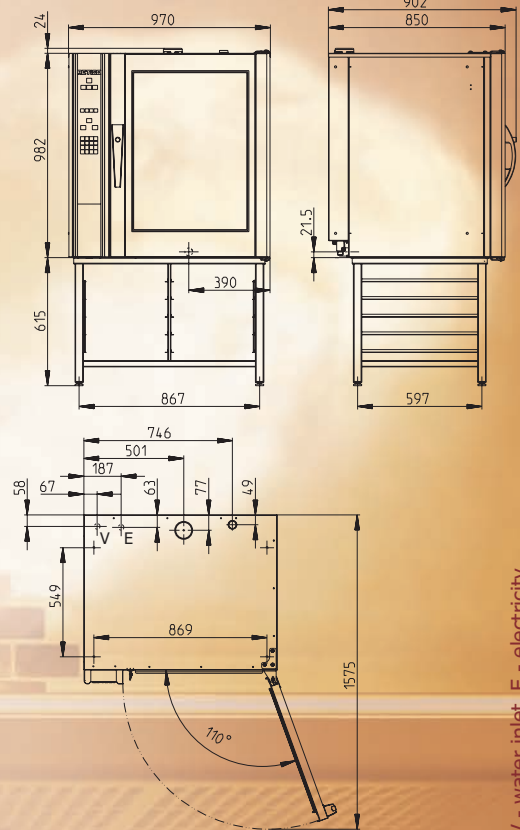

V - water inlet, E - electricity

Model	HP 5	HP 8
Capacity	5 trays 400/600 mm	8 trays 400/600 mm
Baking area	1,2 m ²	1,92 m ²
Spacing	85 mm	85 mm
Dimensions (WxHxD)	970 x 727 x 850 mm	970 x 982 x 850 mm
Weight	125 kg	150 kg
Voltage	3 N~ / 400 V / 50 Hz	3N~ / 400V / 50Hz
Total power	13,8 kW	20,8 kW
Heat power	13 kW	20 kW
Fuse protection	25 A	32 A
Water connection/drain	G 3/4" / 40 mm	G 3/4" / 40 mm
Temperature	30 - 280 °C	30 - 280 °C

RETIGO Ltd.,

Láň 2310, PS 43, 756 64 Rožnov pod Radhoštěm, Czech Republic, tel/fax: +420 571 652 434, info@retigo.cz, www.retigo.com